

Winmate Product Naming Rule

WinMate Communication Inc.
Jan, 2008



WinMate Communication INC.

Industrial Solutions Provider



WinMate Communication INC.

SBC Product Line Naming Rule

www.winmate.com.tw

A **2** **7** **0**

Processor Platform

- A : AMD Platform
- I : Intel Platform
- V : VIA Platform


Development Order

From 1 to Z

Form Factor Configuration

- 3 : 3.5-inch Form Factor
- 7 : Mini-ITX Form Factor
- 8 : Special Form Factor

Project Configuration

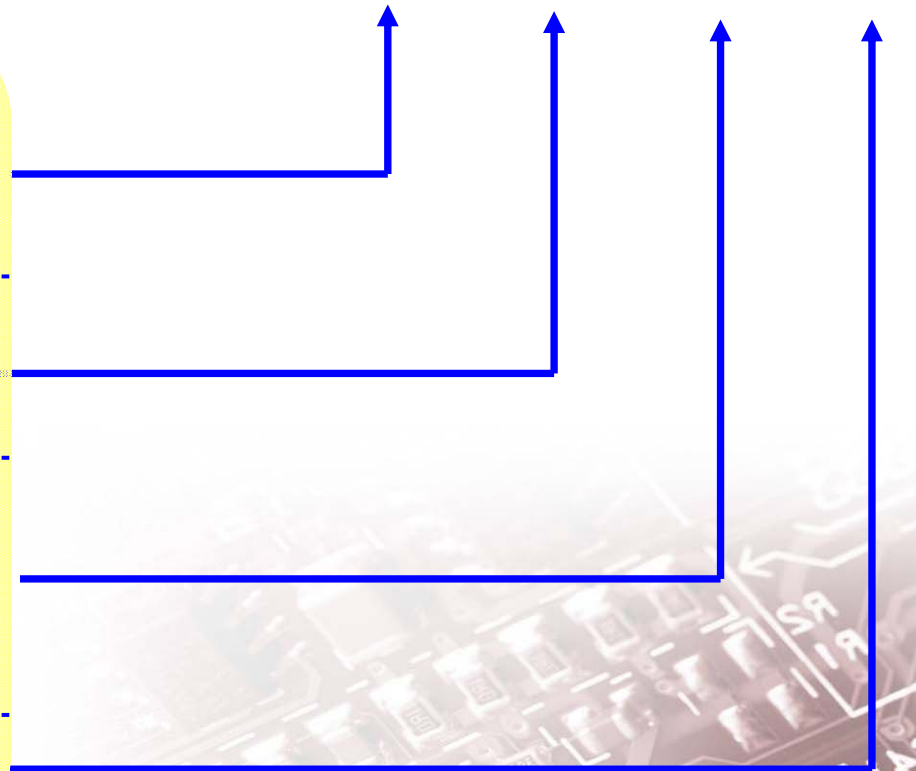



WinMate Communication INC.

Panel PC Product Line Naming Rule

www.winmate.com.tw

R 08 I 37 T – OF T1 (TR)

Aspect ratio

R : 4:3

W : 16:9 or 16:10

Display Size

Single Board Computer

A830.A831.A270.I330.I370...etc

Panel PC Type

S : Built in 3.5-inch SBC

T : Built in Mini-ITX SBC

M : Built in Battery (Mobile)

Housing Configuration

OF : Open Frame

PM : Panel Mount

IP : IP65

CH : Chassis

RK : Rack Mount

KT : kit

POS : POS

MR : Marine

VM : Rugged


RT : Tablet

Panel Model Name

Special Function

TR : Transflective

HM : HMI

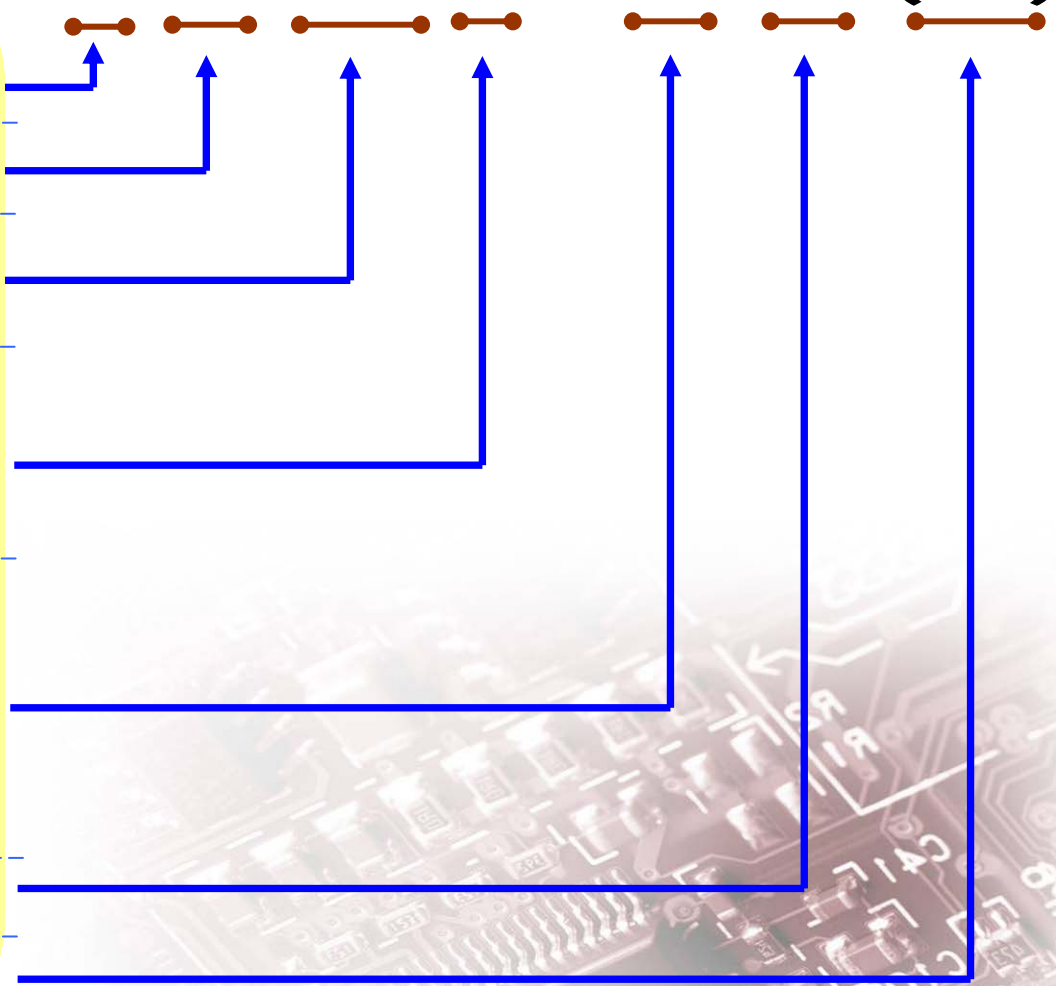



WinMate Communication INC.

Box PC Product Line Naming Rule

www.winmate.com.tw

I 3 7 0 S B 7 - 0 0 1

Single Board Computer

A830.A831.A270.I330.I370...etc

Slim Box PC

SB3 : Box PC w/ 3.5-inch SBC
SB7 : Box PC w/ Mini-ITX SBC
EAC : Embedded Automation Controller


Chassis Configuration

0 : Metal Housing Design
1 : Aluminum Profile With Fin Type I
2 : Aluminum Profile With Fin Type II

Thermal Configuration

0 : Fanless Thermal Design
1 : Fan Thermal Design

Project Configuration

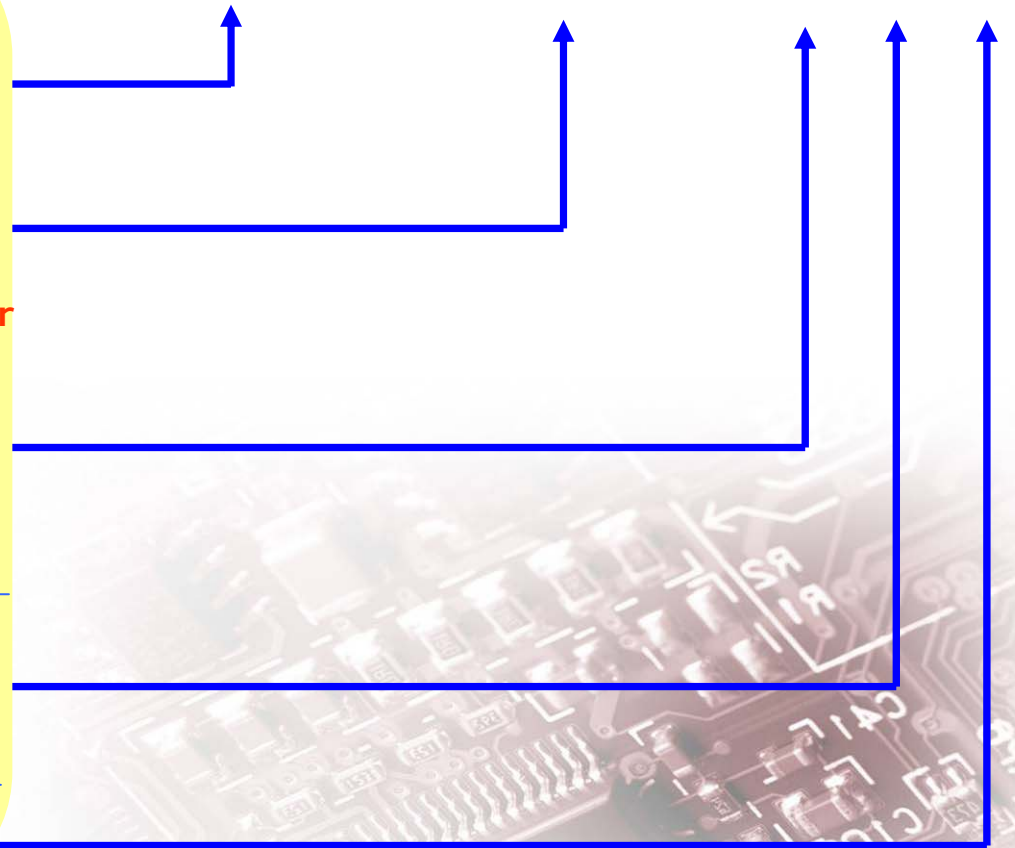



WinMate Communication INC.

DC/DC Converter Product Line Naming Rule

www.winmate.com.tw

DD – WP 24 12 – 220 IL

DC / DC Converter Board Input Configuration

WP : Wide Power Range input
24 : 24 Voltage input
12 : 12 Voltage input

Output 1st Configuration

12 : 12 Voltage input
AX : ATX input

Output 2nd Configuration

12 : 12 Voltage input
AX : ATX input

Total Output

Max. Total Output Watt

Special Feature

IL: Isolation
SL: Small L Shape

